

Slide out Direction




B

Frame leveling bolts to assist installation


A

A

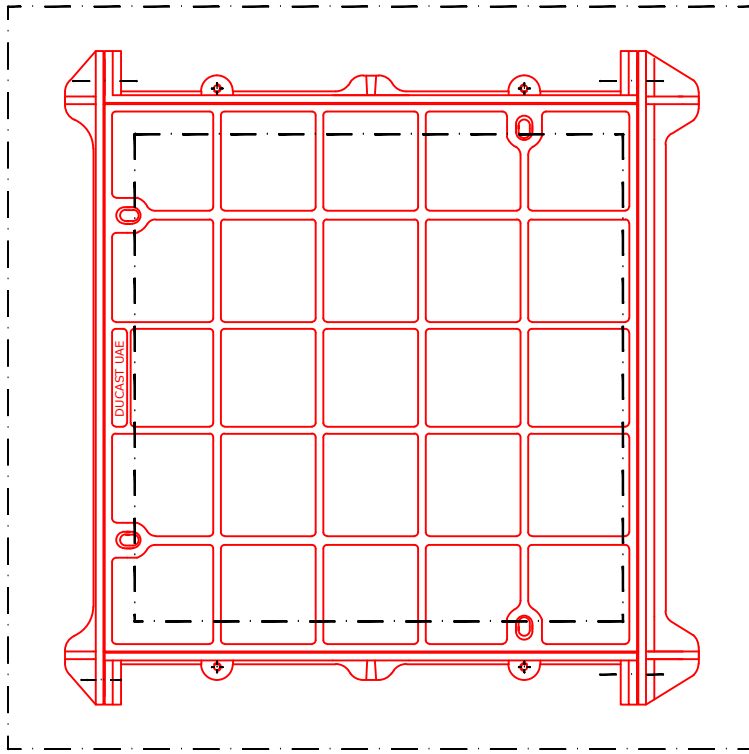


Plan View of Cover & Frame

Covers & rebate to be filled with concrete during installations

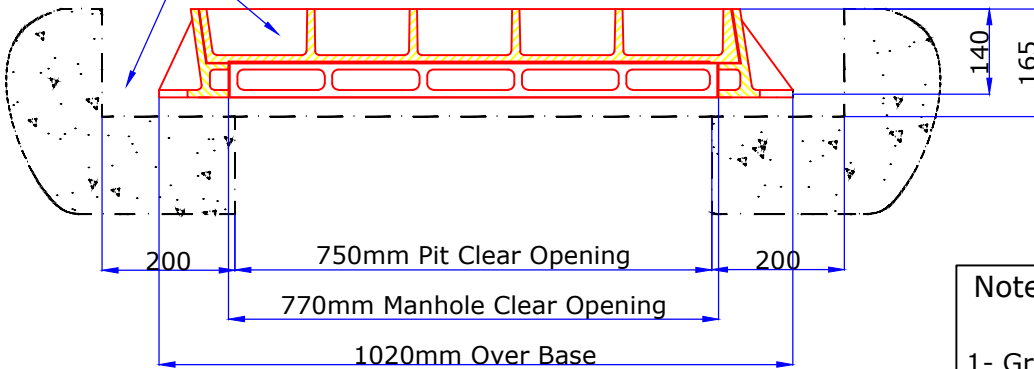

Section A-A

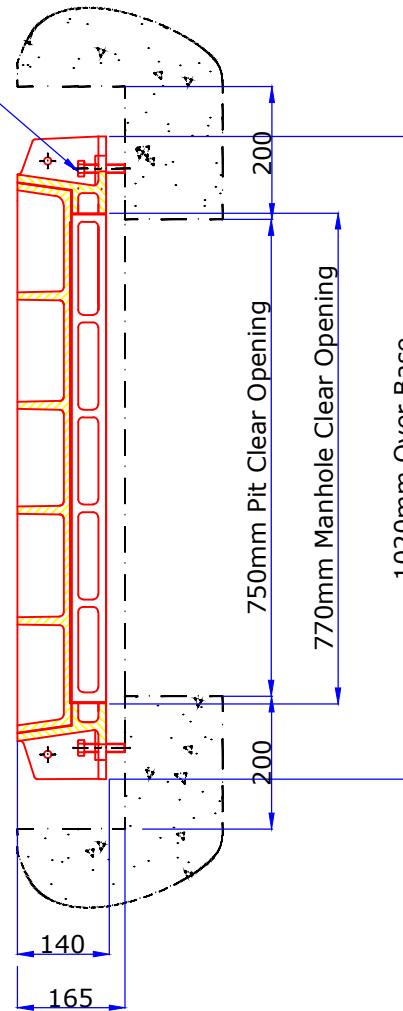

Section B-B

Note:-

1- Graphite Grease to be applied on machined portion to obtain water tightness.

Note:

1). All Clear Opening and Over Base Tolerances will be +15mm - 0.0MM

REVISION	DESCRIPTION	DATE
PROJECT TITLE		

DRAWING TITLE
**750x750mm PIT CLEAR OPENING,
 770x770mm MANHOLE CLEAR OPENING,
 LOADING CLASS F 900 MACHINE
 SEATED SLIDE OUT DUCTILE RECESSED
 COVER & FRAME
 AS PER EN 124-2015 .**



DUCAST FACTORY L.L.C.

DATE	DESIGNED	DRAWN	CHECKED
MAY -2020	AB	SGK	KM
DRAWING No.	REVISION	SCALE	NTS
DI-75F-1P	0		